




Rubber Ceramic Liner

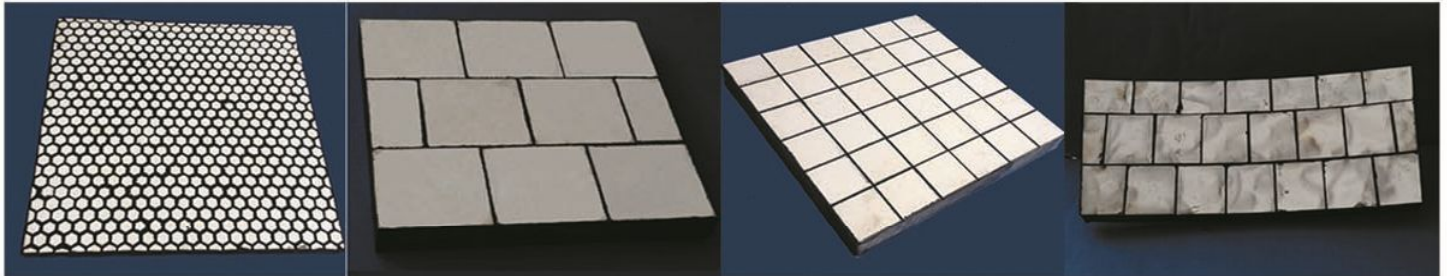

Hex Ceramic Vulcanized



Plain Tile vulcanized

Square Tile Vulcanized

Rubber Ceramic Liner with Angle

Rubber Ceramic Liners Introduction

The rubber ceramic liner is with a high wear resistant ceramics vulcanized within resilient rubber. The ceramics provide excellent resistance to wear, while the elasticity of rubber effectively dampens impact forces. This combination well solved the problem of the wear and impact areas.

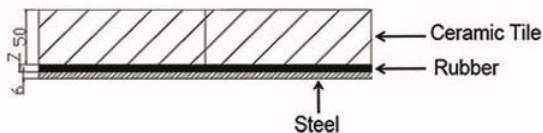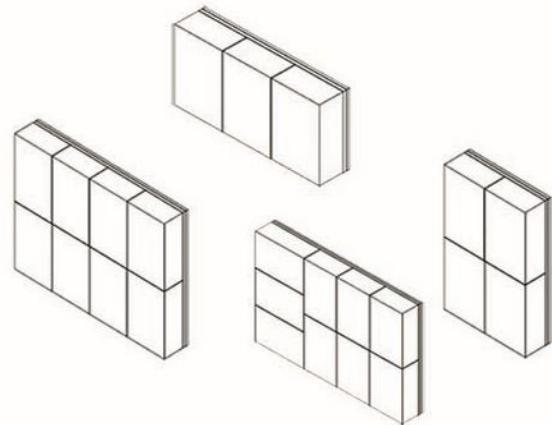

Chemshun Ceramic Liner Advantages

- Extending the wear life for equipment
- Excellent impact resistance
- Excellent sound insulation
- Cost effective
- Customized size to suit
- Reduce maintenance cost and downtime



PINGXIANG CHEMSHUN CERAMICS CO.,LTD



in English



En español

Factory & Office Address: Non-metal Area of Shangliuyuan, Economic Development Zone
Pingxiang City, Jiangxi Province, P.R. China. Code 337000
Tel: 86-799-6790781, 2181002, 2181004 Fax: 86-799-6790785
Website: www.chemshun.com & www.chemshun-es.com Email: office@chemshun.com



Technical Data Sheet of Rubber Ceramic Liner

I .Ceramic specification:

Property	92%Al ₂ O ₃	ZTA Ceramics
Apperance	White,Smooth	White,Smooth
Alumina content	92%	22%ZrO ₂ +77%Al ₂ O ₃
Density(g/cm ³)	3.60	4.20
Vickers Hardness (HV10)	1050	1300
Fracture Toughness(Mpa.m ^{1/2})	3-4	5-6
Porosity (%)	0	0
Dimension tolerance	±1.0mm or ±1% which ever is least	
Ceramic Shape	Ceramic Tiles/Cubes/Cylinder/Hex tile	
Standard according to GB/T6900-2006		


II .Rubber specification:

Property	
Composition	Nature rubber+SBR
Shore Hardness	60±5
Tensile elongation rate(%)	>400%
Tensile strength (Mpa)	25
Tear strength(%)	30
Bonding strength between rubber and ceramic(Mpa)	4
Standard according to GB/T1692-2008,GB/T1121-89	

III .Regular size:

Panel Size	150×300,200×200,300×300,500×500,450×300,530×450...etc
Ceramic size	From 10×10mm to 150×100mm,
Rubber size	Thickness vary from 2mm to 15mm
Steel Size	Thickness vary from 3mm to 10mm
Remark	Metal+rubber+ceramic/Rubber ceramic

IV .Standard Packing:



PINGXIANG CHEMSHUN CERAMICS CO.,LTD



in English



En español

Factory & Office Address: Non-metal Area of Shangliuyuan, Economic Development Zone
Pingxiang City, Jiangxi Province, P.R. China.Code 337000
Tel: 86-799-6790781,2181002,2181004 Fax: 86-799-6790785
Website: www.chemshun.com & www.chemshun-es.com Email: office@chemshun.com